imageRUNNER 1024 / 1024F / 1024iF Specifications

| Main Unit | | | | |
|---------------------------|--------------------|---|--|--|
| Туре | | Personal Desktop | | |
| Developing System | | Single Component Dry Toner Protection Development | | |
| Fixing System | | On-demand Fixing | | |
| Memory | iR1024 / iR1024F | 128MB | | |
| | iR1024iF | 256MB | | |
| First-Copy Time | | Less than 8 sec (A4, from platen glass) | | |
| Warm-Up Time | iR1024 / iR1024F | Less than 16 sec. | | |
| | iR1024iF | Less than 19 sec. | | |
| Copy Speed | | 24 pages / minute (A4) | | |
| Copy Resolution | | Read: 600 dpi x 600 dpi | | |
| | | Write: 1200 dpi enhanced x 600 dpi | | |
| Halftone | | 256 Level | | |
| Maximum Original S | Size | 216 x 356 mm | | |
| Magnification Zoom | | 50% - 200% (1% increments) | | |
| Paper Size | Cassette | A4, LTR, LGL | | |
| | Bypass Tray | 76 x 127 mm to 216 x 356 mm | | |
| Paper Capacity | Cassette | 500 sheets (80g/m²) | | |
| | Bypass Tray | 100 sheets (80g/m²) | | |
| Paper Weight | Cassette | 64 - 90g/m² | | |
| | Bypass Tray | 56 - 128g/m² | | |
| Paper Type | Cassette | Plain, Color, Recycled, Heavy, Bond | | |
| Bypass Tray | | Plain, Color, Recycled, Heavy, Bond, Transparency, Labels, Envelopes | | |
| Multiple Copies | | Max. 99 copies | | |
| Dimensions | iR1024 | 520 mm x 457 mm x 378 mm | | |
| (W x D x H) | iR1024F / iR1024iF | 520 mm x 457 mm x 453 mm | | |
| nstallation Space (W x D) | | 1,117 mm x 984 mm | | |
| Weight | iR1024 | Approx. 22.0 kg | | |
| | iR1024F / iR1024iF | Approx. 24.1 kg | | |
| Power Source | | 220-240V, 50/60 Hz | | |
| Power Consumption | | Max. 1.02 kW | | |

| Printing Feature | | | |
|---------------------|----------|--|--|
| Command Language | | PCL5e*, PCL6*, and UFRII LT (Std.) | |
| Printing Resolution | | 1200 dpi enhanced x 600 dpi | |
| Compatible OS | UFRII LT | Windows® 2000 / XP / Server 2003 / Vista / Server 2008 / Mac OS 10.2.8 or later | |
| | PCL5e/6* | Windows® 2000 / XP / Server 2003 / Vista / Server 2008 / Mac OS 10.2.8 or later | |
| Protocols Supported | | TCP/IP | |
| Interface | | 10/100 Base-TX, USB 2.0 | |

| Local Scanning Feature | |
|------------------------|--|
| Maximum Scanning Size | 216mm x 356mm |
| Scanning Resolution | 600 x 600 dpi (Optical) |
| | 9600 x 9600 dpi (Interpolated) |
| Scanning Speed | Color / Grayscale: 2.56 msec / line (600 dpi) |
| Host Interface | USB 1.1, USB 2.0 |
| System Requirements | Windows® 2000 Professional / XP (32-bit version) / Windows® Vista |
| Device Driver | TWAIN and WIA (Windows® XP / Windows® Vista only) compliant |

Specifications are subject to change without notice. Option names and availability may vary by region. PostScript and PostScript 3 are trademarks of Adobe Systems incoporated, registered in certain jurisdictions.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and other countries. eCopy ShareScan is a trademark of eCopy, Inc. Macintosh is a trademark of Apple Computer, Inc.

All other brand and product names are trademarks and/ or registered trademarks of their respective owners. Product shots and pictures used in the brochure are for illustration purpose only which may vary from the actual product or output.

| Duplex Automatic Document Feeder (For iR1024F / 1024iF only) | | | |
|--|--|--|--|
| Acceptable Originals | 139.7 x 128 mm to 216 x 356 mm | | |
| Maximum Paper Weight | One-sided scanning: 50 to 128 g/m² Two-sided scanning: 50 to 105 g/m² | | |
| Original Tray Capacity | 50 sheets (80 g/m²) | | |
| Maximum Original Scanning Speed | 20 pages / minute | | |

| Universal Send Feature (For iR1024iF only) | | |
|--|--|--|
| Communication Protocol | FTP (TCP/IP), SMB (TCP/IP) | |
| Data Format | TIFF (B&W), PDF (B&W), JPEG (Color), PDF (Compact)(Color) | |
| Resolution | 100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi | |
| System Environment | Windows® XP / 2000 / Server 2003 / Vista / Server 2008 / Mac OS X / Mac OS 10.2.8 & above | |
| Interface | 100 BASE-TX, 10 BASE-T, USB 2.0 | |
| Color Mode | Color, Black and White | |
| Original Type | Text, Text / Photo, Photo | |

| E-mail and I-Fax Features (For iR1024iF only) | | | | |
|---|--------------------|--|--|--|
| Communication Protocol | | SMTP, POP, I-Fax (Simple mode) | | |
| Resolution | For Sending E-mail | 100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi | | |
| | For Sending I-Fax | 200 x 100 dpi, 200 x 200 dpi | | |
| Format | E-mail | TIFF (B&W), PDF (B&W), JPEG (Color), PDF (Compact) (Color) | | |
| | I-Fax | TIFF (MH) | | |
| Original Size | E-mail | A4, A5, A5R, B5, LTR, LGL, STMTR, STMT | | |
| | I-Fax | A4, A5, A5R, B5, LTR, LGL, STMTR, STMT | | |
| Server Software | | Microsoft Exchange Server 5.5 (SP2) Sendmail 8.11.2, Lotus Domino R4.5/R5 | | |

| Super G3 Fax Feature (For iR1024F / 1024iF only) | | | |
|--|---|--|--|
| Applicable Line Public Switched Telephone Network (PSTN) | | | |
| Transmission Speed | Super G3: 33.6 kbps | | |
| Compression Method | MH, MR, MMR, JBIG | | |
| Auto Dial Function | One-touch speed dialing: 23 destinations Coded speed dialing: 177 destinations | | |

| Cassette Feeding Module-N2 (Optional) | | |
|---------------------------------------|---------------------------------|--|
| Paper Size | A4, LTR, LGL | |
| Paper Capacity | 500 sheets x 1 drawer (80 g/m²) | |
| Dimensions (W x D x H) | 520 mm x 440 mm x 158 mm | |

^{*} Requires PCL Printer Kit AB1


- Options:
 Card Reader E1
- Network I/F Adapter IN-E11 (for iR1024 / 1024F)
- PCL Printer Kit AB1



CANON HONGKONG COMPANY LTD.

19/F., The Metropolis Tower, 10 Metropolis Drive, Hunghom, Kowloon, Hong Kong Hotline: 3191 2388

Website: http://www.canon.com.hk









A smart and compact device with Canon's cutting-edge digital technology for modern offices

Understanding the needs of versatile office environments, the iR1024 series is built with Canon's leading-edge digital processing technologies to optimize productivity and enhance efficiency for both SMEs and corporate workgroups.

This sophisticated device comes with a subtly compact design and a rich array of input and output features. Its user-friendly solutions not only make a truly digitized office come true with ease, but also help users to handle multitasking jobs smoothly with low operational cost.

The iR1024 series device is an indispensable tool for office of all kinds that strive for greater business development and higher accuracy at work.



| | Сору | Duplex Print | Color Scan | Fax | Color Send | Network |
|----------|------|--------------|------------|----------|------------|----------|
| iR1024 | / | / | 1 | | | Optional |
| iR1024F | 1 | 1 | 1 | √ | | Optional |
| iR1024iF | 1 | ✓ | / | 1 | / | / |





iR 1024 F / iR 1024 iF






Technology

Offering the elements you need in digital office environments

Highlighting compact design

Designed to save space for every office, the main unit of iR1024 series are merely 520mm. More significantly, this compact design enables the device to handle double-sided output completely with easy access for replenishing supplies in a busy working environment.






Handling double-sided documents automatically

This compact device featuring Automatic Trayless Duplexing, this device also supports double-sided printing functions for COPY, FAX, and PRINT.

Saving energy with fast warm-up time

Built with a new On-demand Fixing technology, the iR1024 series can reduce power consumption to 5W in Energy Save mode. Also, it enables quick warm-up time from sleep states within 1 second.



On Demand Fixing Method

Replacing toner bottle with ease

Realizing the importance of an uncluttered office, the iR1024 series features a convenient set-on toner bottle design to offer a simpler and cleaner toner bottle replacement method for all users.



Enhancing operating efficiency with intuitive LCD Panel

This device comes with a user-friendly LCD panel for easy operation. Fax functionality includes 23 one-touch speed dial keys, 177 coded speed dials, and group dialing for fast access to frequently called numbers.





Offering high protection with sophisticated green technology

Paying attention to environmental protection. The iR1024 series also supports European RoHS standards and fully complies with the International Energy Star Program.

Copy


Enabling smart copying with ease-to-use functionality

Print

Empowering extraordinary printing performance

Saving time with Copy Reservation

With Copy Reservation feature, users do not need to stand in front of the device waiting for someone's print or copy job to be completed. This significantly saves time and allows walk-up users to program all settings and scan originals into the memory. Its built-in Scan-Once-Print-Many function can scan originals into the memory, enabling copy jobs to be done automatically with sequence control.

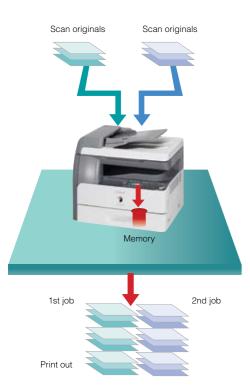

Reducing paper consumption and boosting convenience with 2-on-1 Combination

The iR1024 series features a 2-on-1 combination that automatically copy two documents and print them on one selected paper size. This not only saves paper but also reduces filing space and fax expenses.



Cleaning up documents with frame erase mode

To ensure excellent outputs, this device is equipped with a convenient frame-erase mode to help users erase shadows and lines when copying various types of documents. This is especially good for copying documents with punch holes or the images of original book frames.



Copy reservation

Using Electronic Copy Collation to simplify document procedures

With a refined Copy Collation feature, users can simplify business procedures by collating copied documents into arranged sets with page order. Operating with the Scan-Once-Print-Many technology, one complete set of output, up to 99 multi-page documents, can be done without hassle in descending page order.



Achieving high performance with sophisticated UFRII LT technology

The iR1024 is built with an exceptional UFRII LT (Ultra-Fast Rendering II LT) technology, which enables high-speed printing at 1200 dpi enhanced x 600 dpi resolution. Also, it supports the optional PCL5e/6 technology to enable efficient data translation into different printer languages.



Offering easy-to-use printer drivers with enhanced capabilities


This device comes equipped with a sophisticated but user-friendly interface that is designed to cater for the versatile user needs. These ingeniously designed printer drivers and utilities enable both local and network-connected users to program printer tasks with no hassle.





Utilizing PageComposer to view and merge documents

With Canon's PageComposer, users can view and combine two or more jobs created by different applications into a single electronic document. Also, users can preview, manipulate, and print e-documents anytime with ease.



3

Scan & Send

Realizing highly efficient e-communication with innovative technology


User-friendly Color Scan for light scanning requirements

With a sophisticated USB-connected local color scan feature, the iR1024 series supports both TWAIN and WIA standards and can capture black and white or color documents efficiently. Also, its iR toolbox driver provides outstanding operability and reliability for workgroups with light scanning requirements.




Making multi-destinations delivery possible with Universal Send

Simplifying the workflow with ease, iR1024 iF is equipped with Canon's Universal Send technology that allows documents to be sent to multiple destinations in a single operation through optional Super G3 Fax, or via Internet as e-mail or I-fax.

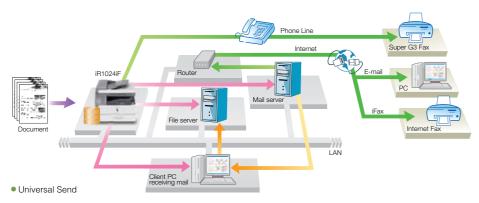

Reducing document data volume with high compression PDF conversion

The iR1024iF employs Canon's high-compression PDF conversion technology which can significantly compress the size of full-color document files so that they can be easily transmitted over networks. As a result, the file is compressed to about one-tenth of the original size without compromising image quality.



Supporting various file format and scanning modes


This device supports both PDF and TIFF formats as standard for monochrome scanning, as well as JPEG and PDF (Compact) formats for full-color scanning. This enables users to control the file size with superb image quality on every job, avoiding the possibility of overloading the network.

Lax

Delivering sharp fax functionality

Allowing paperless fax to cut unnecessary printouts

Supporting convenient PC fax, users can operate the Canon Fax Driver to fax documents directly from a PC for ultimate efficiency. As a result, paperless fax helps enhance productivity, reduce costs, and preserve resources.



Enhancing the efficiency of fax distribution by Fax Forwarding

With the use of fax forwarding feature, received documents matching the specified forwarding conditions will be forwarded to the desired destination. This assists in sorting and delivers received fax or I-fax to the appropriate destinations smoothly, which eliminates unnecessary printing of the documents.

Storing all incoming faxes in memory

In case of any printing problem, such as the exhaustion of toner or paper, this device can automatically store all incoming faxes in memory. Also, users can program the device to store all received documents in memory beforehand and print them anytime later.

Speeding up transmission with Super G3 fax technology

Equipped with Super G3 technology, the iR1024F/1024iF features a 33.5 Kbps fax transmission speed of approximately 3 seconds per page. With Duplexing Automatic Document Feeder (DADF), it enables hassle-free fax transmission even when processing a double-sided original.



Management Boosting work efficiency

Prohibiting unauthorized access by Department ID Management and control card system

With the standard Department ID Management settings and the optional control card system, the company can protect the device from unauthorized access. Up to 1,000 department/ user IDs and passwords can be registered to help keep track of the copy, scan, and print totals for each department, as well as to control costs.

Facilitating device management with Remote UI* The Remote User Interface (UI) function provides remote access

and device management via a standard Web browser. Users can control all device functions remotely from an Internetenabled PC, such as confirming the status of the device and all job operations.

*Network connection is required.

